
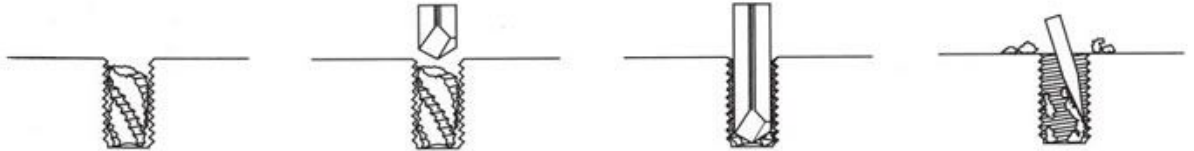
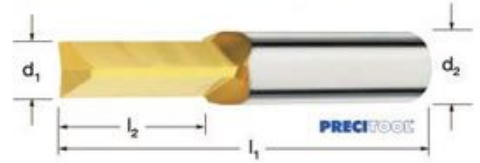


整体硬质合金螺纹修复钻头

PRECITOOL
PRÄZISIONSWERKZEUGE

应用:
适用于钻削修补损坏螺纹。转速1500–3500U/min, (干加工)。工件必须保持稳定夹持状态。螺纹倾斜损坏需要经过对此中心定位。有规律的移除碎屑。



139815 PRECITOOL, 整体硬质合金-TiN涂层, 3-刃

d ₁	139815 (RG 1313)	d ₁ (h10) mm	l ₁ mm	l ₂ mm	d ₂ (h6) mm
M4	●	3,3	50	15	6
M5	●	4,2	50	15	6
M6	●	5,0	50	15	6
M8	●	6,8	60	20	8
M10	●	8,5	70	25	10

d ₁	139815 (RG 1313)	d ₁ (h10) mm	l ₁ mm	l ₂ mm	d ₂ (h6) mm
M12	●	10,2	75	30	12
M14	○	12,0	75	30	12
M16	●	14,0	100	40	14
M18	○	15,5	100	40	16
M20	○	17,5	100	50	18

螺纹修复套装 HELICOIL®plus

Helicoil®plus
made by BOLLHOFF

技术说明:
- 公制 ISO-螺纹
- 不锈钢 A2



内容:
- HELICOIL®plus 3个长度的螺纹套装
- 麻花钻 ≤ M12
- HELICOIL® 高速钢手用丝锥
- HELICOIL®plus 安装杆
- 破碎工具 ≤ M12

139831 HELICOIL, 螺纹修复套装

d (x P) mm	139831 (RG 1380)	P mm	数量
M2	○	0,40	每 20× M2×2 M2×3 M2×4
M2,5	○	0,45	每 20× M2,5×2,5 M2,5×3,75 M2,5×5
M3	●	0,50	每 20× M3×3 M3×4,5 M3×6
M4	●	0,70	每 20× M4×4 M4×6 M4×8
M5	●	0,80	每 20× M5×5 M5×7,5 M5×10
M6	●	1,00	每 20× M6×6 M6×9 M6×12
M8	●	1,25	每 10× M8×8 M8×12 M8×16
M8×1	○	1,00	每 10× M8×1×8 M8×1×12 M8×1×16
M10	●	1,50	每 10× M10×10 M10×15 M10×20
M10×1	○	1,00	每 10× M10×1×10 M10×1×15 M10×1×20
M12	●	1,75	每 10× M12×12 M12×18 M12×24
M12×1,5	○	1,50	每 10× M12×1,5×12 M12×1,5×18 M12×1,5×24
M14	○	2,00	每 10× M14×14 M14×21 M14×28
M14×1,5	●	1,50	每 10× M14×1,5×14 M14×1,5×21 M14×1,5×28
M16	●	2,00	每 10× M16×16 M16×24 M16×32
M16×1,5	○	1,50	每 10× M16×1,5×16 M16×1,5×24 M16×1,5×32

