

L型内六角扳手套装 英寸



- 规格:
- 铬钒钢制成
 - 强化处理
 - 高亮镀镍
 - 塑料架包装



504610 英寸

套件数	504610 (RG 5055)	内含
8	●	5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16
13	●	0,05 1/16 5/64 3/32 7/64 1/8 9/64 5/32 3/16 7/32 1/4 5/16 3/8

L型内六角扳手 带手动折叠手柄



- 规格:
- 钒铬钢制成
 - 硬化处理
 - 电镀钝化
 - 纤维增强塑料手柄，有弹出按钮

型号PG7 和PG9X: 120 mm 长
型号 PK7: 95 mm 长



504510 带折叠手柄

型号	504510 (RG 5055)	内含
PG7	●	2 2,5 3 4 5 6 8
PK7	●	1,5 2 2,5 3 4 5 6
PG9X	●	内六角 3 4 5 6 一字4,5 十字z PH2 TORX®T10 T15 T20

L型内六角扳手 带手动折叠手柄 迷你型



- 规格:
- 铬钒钢制成
 - 硬化处理
 - 电镀钝化
 - 人体工学手柄，55mm长
 - 用于固定小螺丝 例如固定小螺丝或者精确的设定传感器
 - 坚固外壳带弹出按钮



504512 带折叠手柄

型号	504512 (RG 5054)	内含
PM8X	●	内六角 0,7 0,9 1,3 1,5 2,0 一字 1,5 2 十字PH00

● = 德国中央仓库库存
○ = 德国工厂仓库供货


L型内六角扳手 加长型



规格:

- 铬钒钢制成
- 硬化处理和镀镍
- 端面平整加工并且倒角

ISO
2936
lang

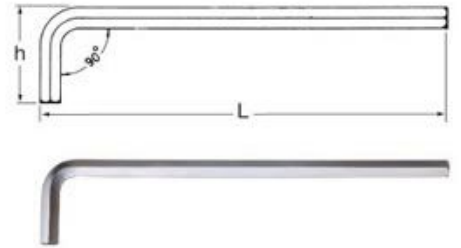


504700 加长

开口宽度 mm	504700 (RG 5072)	总长 L×H mm
1,5	●	91×15
2	●	101×18
2,5	●	113×20
3	●	128×23
4	●	142×29
5	●	163×33
6	●	184×38
7	●	194×41

开口宽度 mm	504700 (RG 5072)	总长 L×H mm
8	●	206×44
9	●	217×47
10	●	231×50
12	●	259×57
14	●	291×70
17	●	333×80
19	●	375×89
—	—	—

L型内六角扳手 加长型



规格:


- Hex-Plus® L型内六角扳手
- 铬钒钢制成, 镀镍*
- 加长型
- Hex-Plus® 减少压力集中效应

ISO
2936
lang



*尺寸1,5和14-22带常规的六角

提示:
产品信息见 50/973.

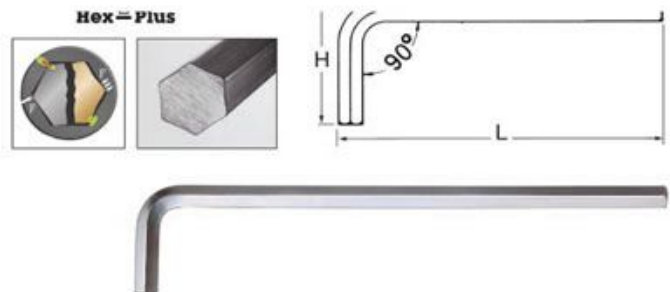

504720 加长

开口宽度 mm	504720 (RG 5050)	总长 L×H mm
2	●	100×16
2,5	●	112×18
3	●	125×20
4	●	140×25
5	●	160×28

开口宽度 mm	504720 (RG 5050)	总长 L×H mm
6	●	180×32
8	●	200×36
10	●	219×40
12	●	250×45
—	—	—

L型内六角扳手套装 加长型



规格:

- 套装
- 加长型
- B8套装 = 塑料盒包装, 镀镍
- S9 套装 = 单独抽取式支架包装, 镀镍
- H9B 套装 = 支架包装, 铬钒钢制, 硬化处理, 磷化处理

DIN/ISO
2936
lang



H11套装 = 支架包装, 适用于所有的折价口袋, 包括开口宽度: 7+9mm



B8



S9



H9B



H11


504710 加长型

型号	504710 (RG 5055)	内含
H9B	●	1,5 2 2,5 3 4 5 6 8 10
S9	●	1,5 2 2,5 3 4 5 6 8 10
B8	●	2 2,5 3 4 5 6 8 10
H11	●	1,5 2 2,5 3 4 5 6 7 8 9 10

规格:

- 铬钒钢制
- 硬化处理, 镀镍
- 端面平整加工并倒角

DIN/ISO
2936
lang

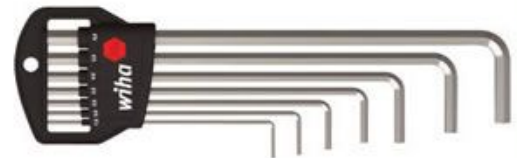

504715 | 加长型, 支架包装

型号	504715 (RG 5054)	内含
7L	●	1,5 2 2,5 3 4 5 6
9L	●	1,5 2 2,5 3 4 5 6 8 10

L型内六角扳手套装 加长型



规格:

- 铬钒钢制成, 镀镍*
- 加长型
- Hex-Plus®技术要求
- 减少切口应力集中效应
- 塑料支架包装

DIN/ISO
2936
lang



504730 加长型

套件数	504730 (RG 5050)	内含
9	●	1,5 2 2,5 3 4 5 6 8 10

● = 德国中央仓库库存
○ = 德国工厂仓库供货

L型 球头-内六角扳手加长型



规格:

- 钒铬钢制
- 硬化处理
- 镀镍
- 强度和尺寸符合DIN/ISO 2936

应用:

可25° 倾斜角拧螺丝。

DIN/ISO
2936
lang



504750 加长

开口宽度 mm	504750 (RG 5054)	总长 L×H mm
1,5	●	91×15
2	●	101×18
2,5	●	113×20
3	●	128×23
4	●	142×29
5	●	163×33

开口宽度 mm	504750 (RG 5054)	总长 L×H mm
6	●	184×38
7	●	195×39
8	●	206×44
9	●	217×47
10	●	231×50
12	●	259×57


L型 球头-内六角扳手 加长型, 颜色涂层



规格:

- 铬钒钢制成
- 硬化处理
- 颜色涂层 (符合ISO 2936L标准)
- 根据不同颜色快速归类
- 可25° 倾斜角拧螺丝

DIN/ISO
2936
lang

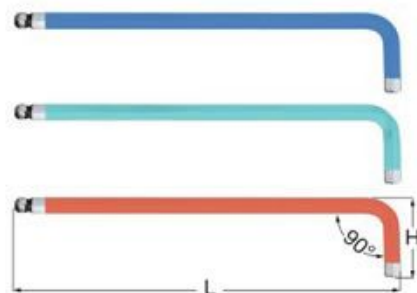

504753 加长型, 颜色涂层

开口宽度 mm	504753 (RG 5054)	总长 L×H mm	颜色涂层
1,5	●	91×15	黑色
2,0	●	101×18	绿色
2,5	●	113×20	绿松石
3,0	●	128×23	淡蓝色
4,0	●	142×29	淡紫色

开口宽度 mm	504753 (RG 5054)	总长 L×H mm	颜色涂层
5,0	●	163×33	红色
6,0	●	184×38	橙色
8,0	●	206×44	黄色
10,0	●	231×20	灰色
-	-	-	-

L型 球头-内六角扳手 加长型, 带魔术球头



规格:

- 铬钒钢制成, 亚光镀铬
- 加长型, 带魔术球头
- 功能, 长度, 硬度,
- 弹簧钢制成适用所有标准螺丝
- 球头可25° 倾斜地拧螺丝

DIN/ISO
2936
lang



504760 长, 魔术球头

开口宽度 mm	504760 (RG 5055)	总长 L×H mm
3	●	128×23
4	●	142×29
5	●	163×33

开口宽度 mm	504760 (RG 5055)	总长 L×H mm
6	●	184×38
8	●	206×44
10	●	231×50

L型-球头-内六角扳手套装



- 规格:
- 钒铬钢制
- 硬化处理
- 亚光镀铬

DIN/ISO
2936
lang



- 套装 H7/H9 = 支架包装, 尺寸标记
套装 B8 = 抽挂盒包装
套装 S9 = 单独抽取式支架包装
套装 H11 = WIHA 通用支架包装 (适合所有折尺) 口袋, 包括开口宽度 7+9mm



504755 加长型

套件数	504755 (RG 5054)	内含
H7	●	1,5 2 2,5 3 4 5 6
H9	●	1,5 2 2,5 3 4 5 6 8 10
S9	●	1,5 2 2,5 3 4 5 6 8 10

套件数	504755 (RG 5054)	内含
B8	●	2 2,5 3 4 5 6 8 10
H11	●	1,5 2 2,5 3 4 5 6 7 8 9 10
-	-	-

L型-球头-内六角扳手套装 加长型 颜色涂层



- 规格:
- 钒铬钢制成, 亚光镀铬
- 硬化处理
- 颜色涂层
- 根据不同颜色快速归类
- 可25° 倾斜角拧螺丝
- 塑料支架包装



504757 颜色涂层

套件数	504757 (RG 5054)	内含
9	●	1,5 2 2,5 3 4 5 6 8 10

L型-球头-内六角扳手套装 加长型



- 规格型:
- 米制
- 带夹套
- 镀铬防锈

DIN/ISO
2936
lang



504772 加长型

套件数	504772 (RG 5050)	内含
9	●	1,5 2 2,5 3 4 5 6 8 10



- = 德国中央仓库库存
○ = 德国工厂仓库供货

L型球头内六角扳手套装, 不锈钢



规格:

- 加长型
- 不锈钢制
- Hex-Plus®通过降低表面压力来减少切口应力集中效应
- 实用橡胶夹包装

DIN/ISO
2936
lang



EDELSTAHL
Rost
frei
AISI
316L
STAINLESS STEEL

Hex-Plus®



504758 不锈钢

套件数	504758 (RG 5050)	内含
9	●	1,5×50 2×100 2,5×112 3×126 4×140 5×160 6×180 8×200 10×219

L型球头内六角扳手套装 加长型, 带魔术球头



规格:

- 钒铬钢制成
- 硬化处理
- 亚光镀铬
- 带弹簧钢制魔术球头, PROSTAR支架包装
- 单握抽取式包装

DIN/ISO
2936
lang



504770 加长型, 魔术球头

套件数	504770 (RG 5055)	内含
9	●	1,5 2 2,5 3 4 5 6 8 10

L型球头内六角扳手套装 ErgoStar



规格:

- 镀铬钒钢制成
- 硬化处理
- 高光镀铬
- 创新支架包装, 可取用任意规格产品的同时, 无需移动其他产品
- 球头可30° 倾斜

DIN/ISO
2936
lang



504775 ErgoStar

套件数	504775 (RG 5055)	内含
9	●	1,5 2,0 2,5 3,0 4,0 5,0 6,0 8,0 10,0